




**High Speed Engraving spindle
SY-100-30K-8.5kW**



Housing Diameter (mm)	Φ100h6
Operating Speed (RPM)	30,000
Power S1/S6 (kW)	7/8.5
Motor Voltage (V)	380
Motor Type	Asynchronous
Torgue S1/S6 (Nm)	3.3/4.0
Bearing Lubrication	Grease
Tool Interface	HSK-E32 / ISO-25
Motor Cooling	Water
Axial Rigidity (N/um)	88
Radial Rigidity (N/um)	120

Dimensions

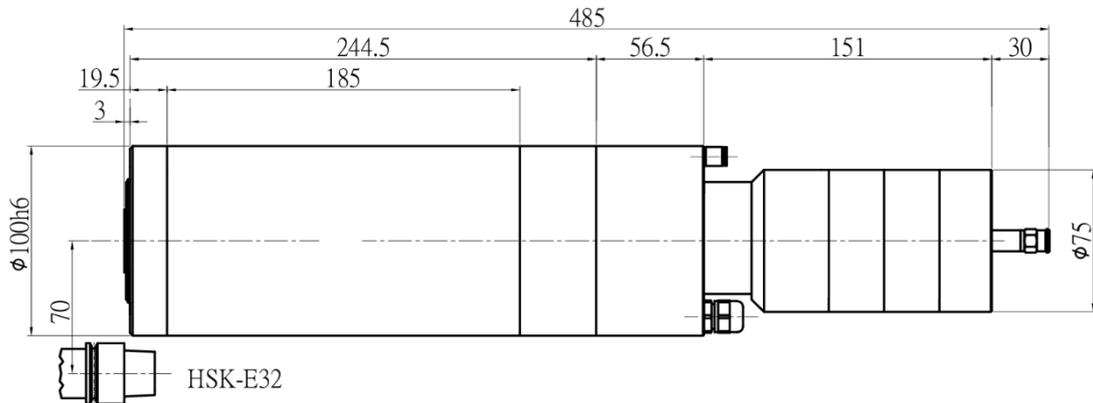

Motor Characteristics

