SPINDLEX
www.spindle-tech.com

DESIGN
MANUFACTURING
REPAIRING

High Power Internal Grinding Spindle
SYG-150-30K-23kW

Housing Diameter (mm)	Φ150h6
Operating Speed (RPM)	30,000
Power S1/S6 (kW)	18/23
Motor Voltage (V)	350
Motor Type	Asynchronous
Torgue S1/S6 (Nm)	9.55/12.2
Bearing Lubrication	Oil-Air
Tool Interface	M32*P2.0 / HSK-C50
Motor Cooling	Water
Axial Rigidity (N/um)	125
Radial Rigidity (N/um)	200

Dimensions

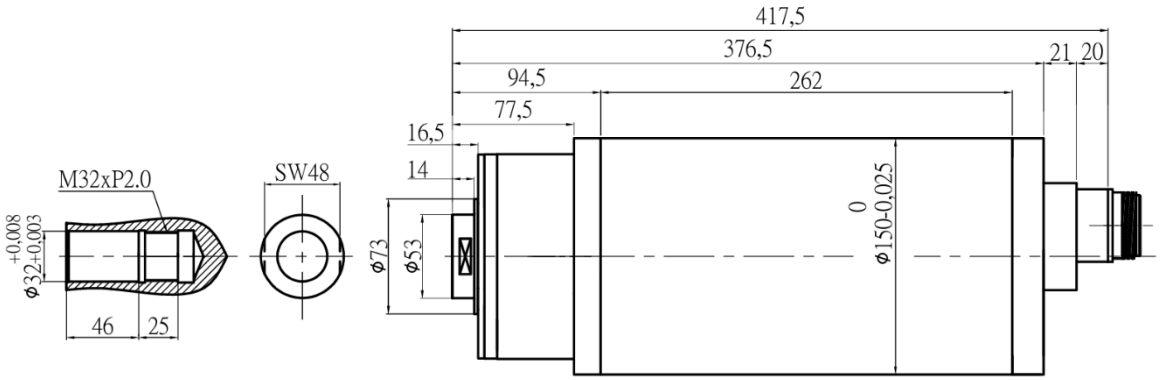

Motor Characteristics

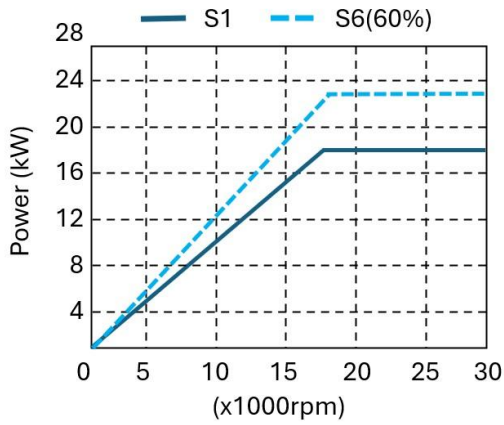

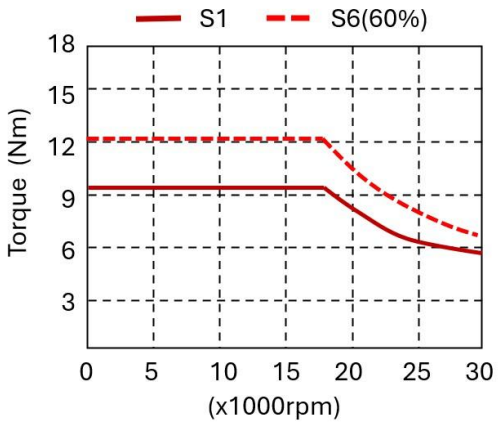

SPINDLEX TECHNOLOGIES Co. Ltd
TEL : +886-2-29950267 **FAX** : +886-2-29958334 **Email**: spindlex@spindlex.com.tw
Address: No.21, Ln. 204, Zhongxing N. St., Sanchong Dist., New Taipei City 241, Taiwan (R.O.C.)