




**High Speed Engraving spindle
SY-80-40K-3.3kW**



Housing Diameter (mm)	Φ80h6
Operating Speed (RPM)	40,000
Power S1/S6 (kW)	2.5/3.3
Motor Voltage (V)	380/220
Motor Type	Asynchronous
Torgue S1/S6 (Nm)	0.6/0.81
Bearing Lubrication	Grease
Tool Interface	HSK-E25 / ISO-20
Motor Cooling	Water
Axial Rigidity (N/um)	50
Radial Rigidity (N/um)	52

Dimensions

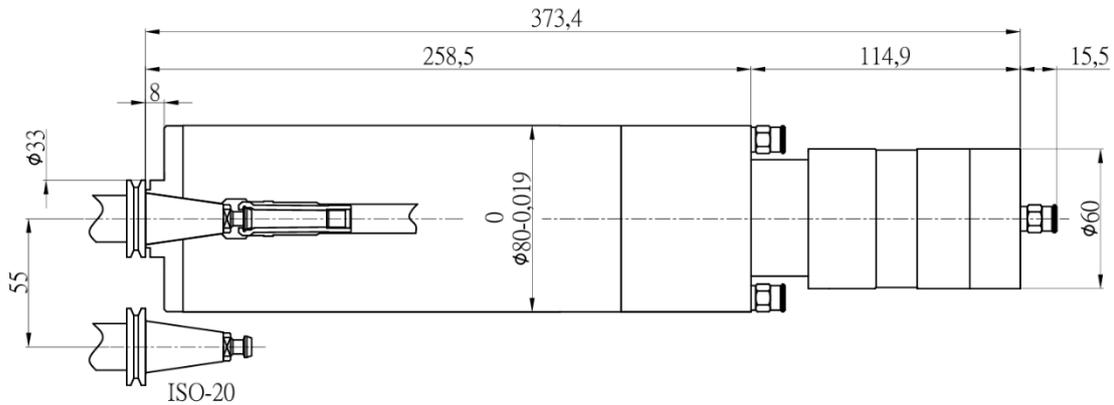

Motor Characteristics

